


g4548 RF Gateway

Octa DVB-T2/C2

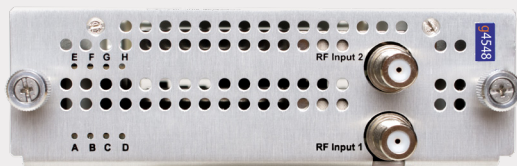

The g4548 RF Gateway captures live TV and radio from terrestrial sources and streams them across an IP network. With eight inputs in a single blade, the g4548 combines low cost per channel with high reliability.

Interfaces

- Eight DVB-T/T2/C/C2 tuners (dual 75 ohm F-type input connectors, each RF input feeds four tuners)
- Two 802.3 100/1000BaseT Ethernet (RJ-45 chassis sockets, dual Ethernet features require c1210 Chassis)
- Serial RS232 port for local administration (RJ-45 chassis socket)

Streaming

- Single program MPEG-2 transport streams (ISO/IEC 13818-1)
- RTP
- UDP
- IP multicast
- IP unicast
- 500 Mbps total output streaming

Management

- Configurable using management tools:
 - Admin level management using Avidia Server Site Manager application
 - HTTPS device web interface; recommended browser: Chrome®
- RESTful API
- Serial RS232 Admin Port
- Event logging via Syslog (local and remote)
- Firmware upgrade
- Configuration backup/restore

Features & Benefits

- High density product with eight DVB-T/T2/C/C2 RF tuners per blade for free-to-air TV or radio channels
- Any stream codec and resolution support
- Advanced filtering to control bandwidth or provide data services such as EPG or MHEG data
- Single blade delivers maximum channel density for minimum rack space
- 5th generation RF Gateway technology delivers high reliability, optimised low power consumption and best in class RF performance

Channel Management

- Channel announcement via SAP/SDP
- Interoperable with Samsung LYNK REACH 4 servers
- Configurable DVB-T/T2/C/C2 scanning (basic and advanced modes)
- Stream specific channels from selected multiplexes
- Multicast/unicast address selection (automatic or manual)
- Configure channel name and number
- Fine-grained control over audio, subtitles and other channel metadata using advanced PID filtering:
 - Create custom SPTS streams containing elements from a channel
 - Filters on PSI data, table types and PID number
 - Unlimited number of PIDs filtered

RF Input

- Maximum data rate of 72Mbps per transport stream
- Input frequency range: 42-1002 MHz

DVB-T (ETSI EN 300-744)

- Input sensitivity:
 - -79.6dBm (8K, 64 QAM, Code Rate 2/3)
- Signal modulation / coding:
 - FFT 2K, 8K, QPSK, 16QAM, 64QAM
- Code rate 1/2, 2/3, 3/4, 5/6, 7/8
- Guard interval 1/4, 1/8, 1/16, 1/32
- FEC: Reed Solomon & Viterbi
- Channel Bandwidth: 6 MHz, 7 MHz, 8 MHz

DVB-T2 (ETSI EN 302-755)

- Input sensitivity:
 - -78.1dBm (8K, 64 QAM, Code Rate 2/3, DTG 104)
 - -78.2dBm (32K, 256 QAM, Code Rate 3/5, DTG 106)
 - -76.3dBm (32K, 256 QAM, Code Rate 2/3, DTG 109)
- Signal modulation / coding:
 - FFT 1K, 2K, 4K, 8K, 16K, 32K
 - QPSK, 16QAM, 64QAM, 256 QAM
- Code rate 1/2, 3/5, 2/3, 3/4, 4/5, 5/6
- Guard interval 1/4, 19/256, 1/8, 19/128, 1/16, 1/32, 1/128
- FEC: BCH & LDPC
- Channel Bandwidth:
 - 1.712 MHz, 5 MHz, 6 MHz, 7 MHz, 8 MHz

DVB-C (ETSI EN 300-429)

- Input sensitivity:
 - -79.6dBm (64 QAM, Code Rate 2/3)
- Signal modulation / coding:
 - 16QAM, 32QAM, 64QAM, 128QAM, 256 QAM
- Channel Bandwidth: 8 MHz
- FEC: Reed Solomon & Viterbi
- Symbol Rates: 1.8 – 7.2 Msym/s
- Roll off: 0.15

DVB-C2 (ETSI EN 302-769)

- Input sensitivity:
 - -76.3dBm (1024 QAM, Code Rate 3/4)
- Signal modulation / coding:
 - 16QAM, 64QAM, 256 QAM, 1024QAM, 4096QAM
- Code rate 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
- Guard interval 1/64, 1/128
- Channel Bandwidth: 6Mhz, 8 MHz
- FEC: BCH & LDPC
- Symbol Rates: 1.8 – 7.2 Msym/s
- Roll off: 0.15

System

- Linux-based

Network

- Linux dual IPv4/IPv6 stack
- DHCP/DHCPv6 or Static IP addressing
- Two IEEE 802.3u 100/1000Mbps MDIX Ethernet Interfaces
- Ethernet redundancy - automatic switching to secondary Ethernet if network failure occurs (c1210 Chassis required)

Protocols

IP (RFC 791), UDP (RFC 768), TCP (RFC 793), ARP (RFC 826), DNS (RFC 1035), DHCP (RFC 2131), ICMP (RFC 792), IGMP v3 (RFC 3376), HTTP (RFC 2616), HTTPS (RFC 2818), Syslog (RFC 3164), NTP (RFC 1305), SAP (RFC 2974), SDP (RFC 4566), RTP (RFC 3550), SSDP, IPv6 (RFC 8200), DHCPv6 (RFC 8415), SLAAC (RFC 4862), MLD (v2) (RFC 3810), NDP (RFC 4861)

Regulatory

- CE:
 - IEC 62368-1: 2018
 - EN55032:2015
 - EN55035:2017
 - EN61000-3-2: 2019
 - EN61000-3-3: 2013 +A1: 2019
- UL/CSA:
 - UL62368-1:2019
 - CSA C22.2 No. 62368-1:2019
- FCC:
 - 47CFR:2011 Part 15, Sub Part B
 - ANSI C63-4:2014
- Australia/New Zealand:
 - AS/NZS 62368:2018

Physical Format

- Modular hot-swap blade
 - c1101 Chassis (8 inputs)
 - c1103 Chassis (up to 24 inputs)
 - c1210 Chassis (up to 80 inputs)

Environment

- Operating: 0 ...+40°C / +32 ... +104°F
- Storage: -20 ...+70°C / -4 ... +158°F
- Operating and storage Relative Humidity: 10-90% (non-condensing)

Dimensions

- L: 275mm x W: 130mm x H: 40mm; weight 0.55kg

Power

- DC 24V: 21W Typical, 31W Maximum

MTBF

- Calculated to MIL-HDBK-217F, Notice 2: 38791 hours (4.4 years).

In the Box

- g4548, octa DVB-T/T2/DVB-C/C2 RF Gateway
- Product Safety Brochure (hard copy)

Ordering Information (P/N)

- 18522 - g4548 - 8 tuner DVB-T2/C2